Vol. 2, Issue 1, pp: (8-12), Month: April 2015 – September 2015, Available at: www.paperpublications.org

Influence of Rare Earth (Gd³⁺) On Electrical and Magnetic Studies of Nickel Ferrite Nanoparticles

¹K Rafeekali, ¹Muhammed Maheen

Research department of physics, Maharajas College, Eranakulam, Kerala, India

Abstract: Nanoparticles NiFe_{2-x}Gd_xO₄ (x=0, 0.1, 0.2, 0.3, 0.4) was prepared by solgel combution method. The samples were characterized with VSM and Electrical measurements. Complex impedance and Complex electric modulus plots were further studied for complete contribution of grains and grain boundary resistances to conduction and resonance frequencies respectively. Magnetic studies by Vibrating Sample Magnetometer (VSM) shows that magnetization (Ms) decreases with increase in Gd3+ concentration. Coercivity (Hc) first decreases for x=0.1, after which it increases up to x=0.4.

Keywords: Rare earth ions, Resistivity, Impedence, VSM, Magnetization, Coercivity.

1. INTRODUCTION

In the recent years, so much attention has been paid to the nanomagnetic materials that show very interesting magnetic properties. In this material, different properties and applications are appeared as compared to their bulk counterparts. The magnetic properties of nanomaterials are used in medical, electronic, and recording industries that depend on the size, shape, purity and magnetic stability of these materials. In biomedical application, one can use nano magnetic materials as drug carriers inside body where the conventional drug may not work. For this purpose, the nanosize particles should be in the super paramagnetic form with a low blocking temperature. Ferrite nanomaterials are object of intense research because of their proper magnetic properties. It has been reported that when the size of particles reduced to small size or in range of nanomaterials, some of their fundamental properties are affected. Nano ferrites are simultaneously good magnetic and dielectric materials. These properties of the nano ferrites are affected by the preparation conditions, chemical composition, sintering temperature and the method of preparation. Several chemical and physical methods such as spray pyrolysis, sol-gel, co-precipitation, combustion technique, high energy milling etc. have been used for the fabrication of stoichiometric and chemically pure nano ferrite materials. Among the available chemical methods, the solgel technique is an excellent method to synthesize rare earth substituted nanoparticles with maximum purity. In spite of the development of a variety of synthesis routes, the production of nickel ferrite nanoparticles with desirable size and magnetic properties is still a challenge. This would justify any effort to produce size tuned nickel ferrite nanoparticles with rare earth substitution. In the present paper, the structural and magnetic properties of gadolinium substituted nickel ferrite and VSM and electrical properties were investigated.

2. EXPERIMENTAL

2.1. Synthesis:

Nano particles of Gadolinium substituted nickel ferrite were synthesized by the sol-gel combustion method. A stoichiometric ratio of NiFe_{2-x}Gd_xO₄ (x=0, 0.1, 0.2, 0.3, 0.4) were dissolved in ethylene glycol using a magnetic stirrer. The five sample solutions was then heated at 60 °C for 2 hours until a wet gel of the metal nitrates was obtained. The

Vol. 2, Issue 1, pp: (8-12), Month: April 2015 – September 2015, Available at: www.paperpublications.org

gel was then dried at $120\,^{\circ}$ C. This resulted in the self ignition of the gel producing a highly voluminous and fluffy product. The combustion can be considered as a thermally induced redox reaction of the gel wherein ethylene glycol acts as the reducing agent and the nitrate ion acts as an oxidant. The nitrate ion provides an oxidizing environment for the decomposition of the organic component. The obtained powder of different samples NiFe_{2-x}Gd_xO₄ (x=0, 0.1, 0.2, 0.3, 0.4) was ground well collected in different packets for the measurements.

2.2. Characterization:

Electrical resistivities were measured using two probe method at room temperature. Pellets (13mmin diameter) of samples were used for measuring the impedance and electric modulus properties using precision impedance analyzer (Wayne Kerr 6500B) at room temperature. Where Theta is the phase angle measured from LCR meter. Magnetic properties were studied using a vibrating sample magnetometer (VSM) under an applied field of 10 kOe.

3. RESULTS AND DISCUSSION

3.1. Variation of DC electrical resistivity:

Fig.1 shows the DC electrical resistivity of NiGdxFe2-xO4 with composition (x=0.0 to x=0.4) of the dopant at room temperature. Nickel Ferrite is a highly resistive material with high activation energy. Method of synthesis, type and substitution of doped cations at A and B site, particle size and morphology and sintering temperatures largely affects the electrical properties of spinel ferrites. This can be observed from the graph that DC electrical resistivity decreases up to a concentration of x=0.1 but then increases with increase in Gd $^{3+}$ concentration. There is a significant increase in the DC electrical resistivity with Gd $^{3+}$ substitution (x=0.4). resistivity variations with Gd $^{3+}$ substitution can be explained as for x=0.1, Gd $^{3+}$ ions occupy A site replacing Fe3+ due to which number of Fe3+ ions at B-site increases and thus Fe2+. This may happen due to lattice distortion caused by doping a concentration of x=0.1. A low concentration of Gd $^{3+}$ causes a severe change in centro-symmetric FCC structure of parent crystal that causes an increase in hopping of electron and a net electric polarization. This reason is reflected in the high dielectric parameters and a sharp decrease in saturation magnetization for x=0.1.

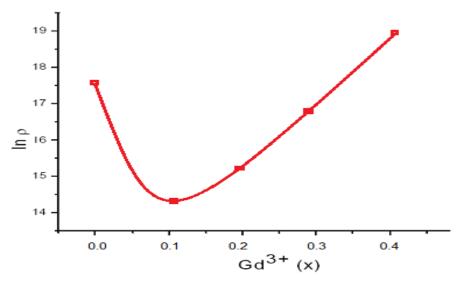


Fig.1. Variation of resistivity with concentration

3.2. Complex impedence:

Complex impedance study were performed at room temperature using the LCR meter in the frequency range of 1KHz to 5 MHz. Impedance analysis is useful to completely understand the electrical properties of spinel type ferrites and give us the data for both resistive (real part) and reactive (imaginary part) contribution to conductivity on the application of AC field. These complex plane plots help to distinguish the grain and grain boundary resistances and interfacial resistance of conducting electrodes. Impedance diagrams, one in low applied fields showing the grain boundary resistances and the other in high field side shows the grains contribution. Only one quarter circle in low field region confirms the

Vol. 2, Issue 1, pp: (8-12), Month: April 2015 – September 2015, Available at: www.paperpublications.org

predominance of grain boundary resistance for the present studied samples of Gd^{3+} doped NiFe nanoparticles. It can also be seen from complex plane plot that grain boundary resistance increases with increase in Gd^{3+} concentration for x=0.4. Complex impedance plane plots were drawn to study the electrical properties of $NiGd_xFe_{2-x}O_4$. The real (Z^{\prime}) and imaginary ($Z^{\prime\prime}$) parts of impedance were calculated using the relations,

$$Z' = \overset{.}{Z} \overset{.}{\cos \theta}$$
$$Z'' = \overset{.}{Z} \sin \theta$$

Where Theta is the phase angle measured from LCR meter. Complex electric modulus was calculated from the standard relations

$$M *= j\omega C_o Z^*$$

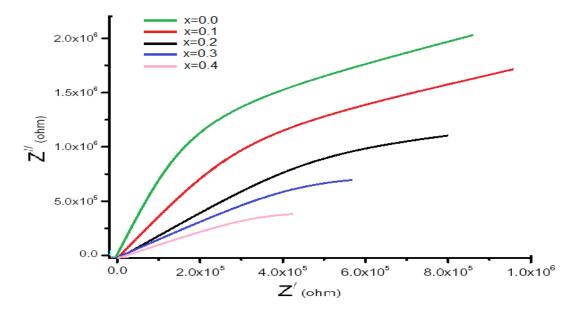


Fig.2. Variation real and imaginary complex impedance

3.3. Magnetic study:

To study the effects of Gd^{3+} doping on magnetization, coercivity, remanent magnetization (Mr) and magneto-crystalline anisotropy (HK) of NiFe, M-H hysteresis loops were recorded using VSM under the applied magnetic field of 10 kOe at room temperature. Fig. shows the hysteresis curves for all the samples under investigation. It is clear that all the samples show a fine s shape loops with a decrease in magnetization (Ms) and coercivity (Hc) with increase in Gd3+ concentration. This is due to the substitution of Gd3+ in place of Fe3+ at B-sites. Gd3+ ions have a higher magnetic moment (7μ B) in place of Fe3+ that has 5 μ B. The order in magnetic moments of rare earth ions is below room temperature, due to this at room temperature Gd³⁺ ion behaves as non magnetic that cause a decrease in saturation magnetization and coercivity. This substitution causes a lattice distortion that alters the magnetic characteristics of materials. Magnetic properties of ferrite materials largely based upon the grain size, cation substitution, and A-B exchange interactions. Increase in the grain size and decrease of A-B super exchange interaction causes canting spins at the surface of nano particles that decreases the magnetic characteristics of the present samples. Spin arrangement for the Ni-Gd ferrites were analyzed by measuring the value of Bohr's magnetron by the relation

$$n_B = \frac{\sigma_s}{5585} M_W$$

Where

$$n_B = (6+x)Cos\alpha_{Y-K} - 5(1-x)$$

Vol. 2, Issue 1, pp: (8-12), Month: April 2015 – September 2015, Available at: www.paperpublications.org

Where x represents the composition of doping ion. Anisotropy field(Hk) can be calculated by following equations

$$H_k = \frac{2K_1}{\mu_0 M_s}$$

Where $\mu 0$ is the permeability of the free space, Ms is saturation magnetization from the fit. It is clear from the data that cubic anisotropy decreases with increase in gadolinium concentration. Pure nickel ferrite is has high anisotropy constant and field due to occupation at B-sites. It decreases due to Gd^{3+} occupation at B-sites. Cubic anisotropy constant also decreased doping gadolinium showing a decrease in coercivity for present studied samples. The anisotropy parameters (anisotropy constant and field) are not decreasing monotonically but more abruptly due to differing concentration of doping ion.

This behaviour is showing a strong lattice distortion due to Gd³⁺ substitution.

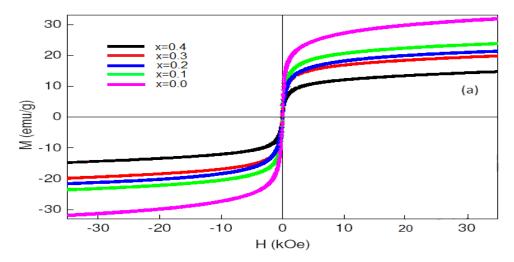


Fig.3. Hysterisis loop of $NiGd_xFe_{2-x}O_4$ at different x (x=0, 0.1, 0.2, 0.3, 0.4)

Nano spinel NiGdxFe2-xO4 with x in step increment of 0.1 has been synthesized by sol-gel combustion. All the studied samples are pure cubic spinel phase ferrites without any impurity metal oxides. DC electrical resistivity increases to 9.5×10^7 with Gd³⁺ substitution except for x=0.1 .Complex impedance reveals that the grain boundary are offering more resistance to conduction showing that smaller grains with more grain boundaries are formed for present samples. Magnetic properties of Gd³⁺ doped Nickel-ferrites decrease due to influence on A-B exchange interactions and spins of electrons on nano particles surface. Saturation magnetization, coercivity and remanance all decreases with increase in dopant concentration. Magnetic anisotropy of nickel-ferrite nano particles decreases with increase in Gd³⁺ concentration (x). Thus the rare earth (Gd³⁺) doped nickel-ferrites found an application in high frequency devices and power supply due to high resistivity and low losses.

4. CONCLUSIONS

Nano spinel NiFe $_{2-x}$ Gd $_x$ O $_4$ with x in step increment has been synthesized by sol-gel Combustion method. All the studied samples are pure cubic spinel phase ferrites without any impurity metal oxides. Complex impedance and Complex electric modulus plots were further studied for complete contribution of grains and grain boundary resistances to conduction and resonance frequencies respectively. Magnetic studies by Vibrating Sample Magnetometer (VSM) shows that magnetization (Ms) decreases with increase in Gd3+ concentration. Coercivity (Hc) first decreases for x=0.1,after which it increases up to x=0.4.

5. ACKNOWLEDGEMENT

RK and MM acknowledges the Maharajas College under Mahathma Gandhi Universty for providing LAB facilities. EMM thanks DST and UGC for the financial support. Authors thank CUSAT Kochi, SAIF, IIT Madras VSM and Electrical measurement facilities.

Vol. 2, Issue 1, pp: (8-12), Month: April 2015 – September 2015, Available at: www.paperpublications.org

REFERENCES

- [1] Kim Y I, Kim D, Lee C S 2003 Synthesis and characterization of CoFe2O4 magneticnanoparticles prepared by temperature-controlled coprecipitation method Physica. B. 337 42
- [2] Kim C S, Yi Y S, Park K T, Namgung H, Lee J G 1999 Chemically prepared magneticnanoparticles J. Appl. Phys. 85 5223–5225.
- [3] Peng J, Hojamberdiev M, Xu Y, Cao B, Wang J, Wu H 2011 Hydrothermal synthesis and magnetic properties of gadolinium doped CoFe2O4 nanoparticles J. Magn. Magn. Mater. 323 133-138.
- [4] Pillai V, Shah D O 1996 Synthesis of high-coercivity cobalt ferrite particles using water-in-oil microemulsions J. Magn. Magn. Mater. 163 243–248.
- [5] Cai W, Wan J Q 2007 Facile synthesis of superparamagnetic magnetite nanoparticles in liquid polyols J. Colloid. Interface. Sci, 305 366–370.
- [6] Sileo E E, Jacobo S E 2004 Gadolinium-Nickel ferrites prepared from metal citrates precursors Physica. B. 354 241-245
- [7] Rashad M M, Mohamed R M, El-Shall H 2008 Magnetic properties of nanocrystalline Sm substituted CoFe2O4 synthesized by citrate precursor method J. Mater. Proc. Technol. 198 139–146.
- [8] Rao K S, Kumara A M, Varmaa M C, Choudary R K, Rao K H 2009 Cation dirtibution of Ti doped cobalt ferrites J. Alloys. Compd. 488 6–9
- [9] Rashad M M, Mohamed R M, El-Shall H 2008 Magnetic properties of nanocrystalline Sm substituted CoFe2O4 synthesized by citrate precursor method J. Mater. Proc. Technol. 198 139–146.
- [10] Rao K S, Kumara A M, Varmaa M C, Choudary R K, Rao K H 2009 Cation dirtibution of Ti doped cobalt ferrites J. Alloys. Compd. 488 6–9